



Symbol	Label	Quantity	Manufacturer	Catalog Number	Description	Light Loss Factor	Wattage
	WP1	4	Lithonia Lighting	WDCXLED P1 27K 80CRIWV VORAGE MOUNTING XX FINISH	WDCXLED WITH P1- 10 LED LIGHT ENGINE, TYPE 4M OPTIC, 3000K, 80CRI, VISUAL COMFORT WIDE OPTIC	0.9	10.0002
	WP2	1	Lithonia Lighting	DSXW1 LED 10C 530 30K T4M MVOLT DDL	DSXW1 LED WITH (L) 10 LED LIGHT ENGINES, TYPE 4M OPTIC, 3000K, @ 530mA WITH DIFFUSE DROP LENS.	0.9	19.1

### STATISTICS

DESCRIPTION	SYMBOL	AVG.	MAX	MIN.	MAX/MIN	AVG/MIN
Boundary	+	0.2 fc	3.2 fc	0.0 fc	N/A	N/A
Pavement	X	0.6 fc	2.7 fc	0.0 fc	N/A	N/A

NOTES:  
 - REFLECTANCES ASSUMED:  
 GROUND: 20  
 - MOUNTING HEIGHTS:  
 WP: 15'-0" & 12'-0" AFG.  
 - TASK HEIGHT: 0'-0" AFG (Blue)  
 - CALCULATION POINT SPACING: 4'x4' OC

Note  
 Relative figures/composites are not  
 included in this calculation, and will  
 not effect the footcandle levels  
 appreciably




Type WP1



Type WP2

### DISCLAIMER:

- THESE DRAWINGS ARE FOR CONCEPTUAL PURPOSES ONLY  
 AND ARE NOT INTENDED FOR CONSTRUCTION. VALUES  
 REPRESENTED ARE BASED ON THE INFORMATION PROVIDED  
 FROM MANUFACTURERS PHOTO-METRIC INFO SHEET OR  
 INDEPENDANT LAB TEST WITH DATA SUPPLIED BY LAMP  
 MANUFACTURERS.

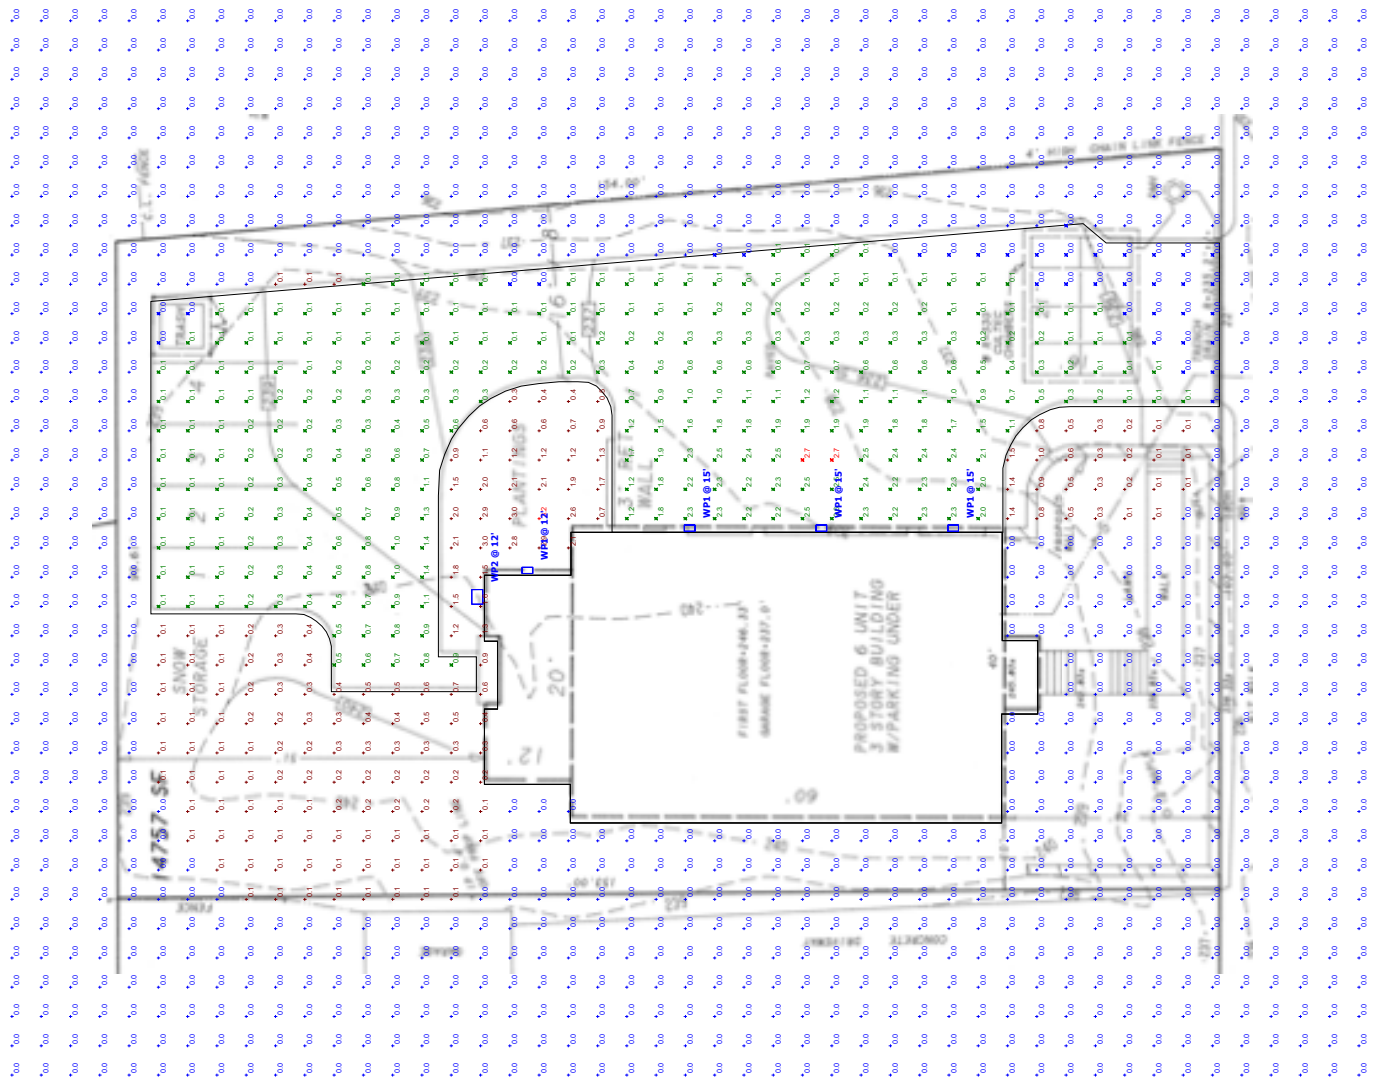

Plan View  
 Scale - 1" = 8ft